


T2.5 Pulley

時規皮帶輪系列 


齒形

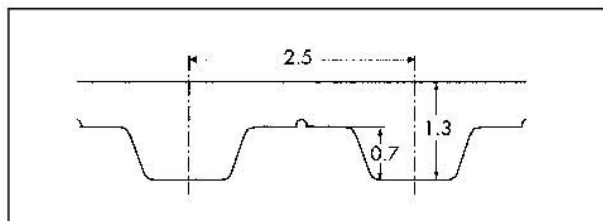


Pulley Code

2.5mm Pitch

20-T2.5-10-BF

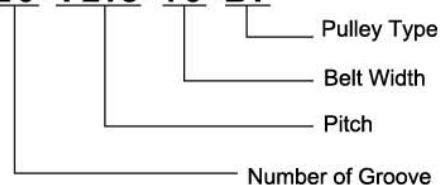

Pulley Type

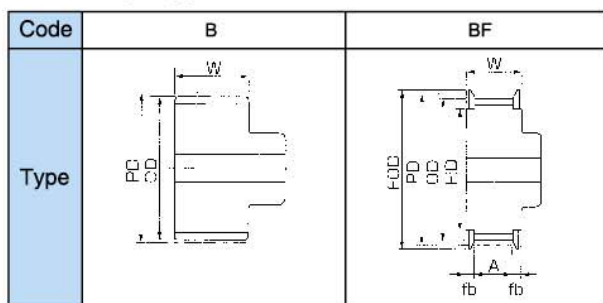

Pulley Dimension Table


Unit mm

齒 數	OD	PD	FOD
12	9.00	9.55	
13	9.80	10.35	
14	10.60	11.14	
15	11.40	11.94	
16	12.20	12.73	18
17	13.00	13.53	18
18	13.80	14.32	18
19	14.60	15.12	21
20	15.40	15.92	21
21	16.20	16.71	21
22	17.00	17.51	23
23	17.80	18.30	23
24	18.55	19.10	23
25	19.35	19.89	25
26	20.15	20.69	25
27	20.95	21.49	25
28	21.75	22.28	28
29	22.55	23.08	28
30	23.35	23.87	29
31	24.15	24.67	29
32	24.95	25.46	30
33	25.75	26.26	30
34	26.55	27.06	32
35	27.35	27.85	33
36	28.10	28.65	33

齒 數	OD	PD	FOD
37	28.90	29.44	34
38	29.70	30.24	35
39	30.50	31.04	35
40	31.30	31.83	38
41	32.10	32.63	38
42	32.90	33.42	40
43	33.70	34.22	40
44	34.50	35.01	40
45	35.30	35.81	43
46	36.10	36.61	43
47	36.90	37.4	43
48	37.70	38.2	44
49	38.45	38.99	44
50	39.25	39.79	45
56	44.05	44.56	50
60	47.25	47.75	54
64	50.40	50.93	56
72	56.80	57.3	62
80	63.15	63.66	70
84	66.35	66.85	74
90	71.12	71.62	80
96	75.90	76.39	83
112	88.65	89.13	95

AT5


with Nylon tooth facing



規格	齒數	規格	齒數
AT5 / 225	45	AT5 / 2500	500
AT5 / 255	51	AT5 / 2650	530
AT5 / 280	56	AT5 / 2800	560
AT5 / 305	61	AT5 / 3000	600
AT5 / 340	68	AT5 / 3150	630
AT5 / 390	78	AT5 / 3350	670
AT5 / 420	84	AT5 / 3550	710
AT5 / 455	91	AT5 / 3750	750
AT5 / 500	100	AT5 / 4000	800
AT5 / 545	109	AT5 / 4250	850
AT5 / 610	122	AT5 / 4500	900
AT5 / 660	132	AT5 / 4750	950
AT5 / 720	144	AT5 / 5000	1000
AT5 / 780	156	AT5 / 5300	1060
AT5 / 840	168	AT5 / 5600	1120
AT5 / 990	198	AT5 / 6000	1200
AT5 / 1075	215	AT5 / 6300	1260
AT5 / 1100	220	AT5 / 6700	1340
AT5 / 1215	242	AT5 / 7100	1420
AT5 / 1380	276	AT5 / 7500	1500
AT5 / 1400	280		
AT5 / 1500	300		
AT5 / 1600	320		
AT5 / 1700	340		
AT5 / 1800	360		
AT5 / 1900	380		
AT5 / 2000	400		
AT5 / 2120	424		
AT5 / 2240	448		
AT5 / 2360	472		


T5

with Nylon tooth facing



T5-DL


with Nylon tooth facing on one side



規格	齒數	規格	齒數
T5 / 220	40	T5 / 840	168
T5 / 215	43	T5 / 900	180
T5 / 220	44	T5 / 990	198
T5 / 225	45	T5 / 1075	215
T5 / 245	49	T5 / 1100	220
T5 / 255	51	T5 / 1215	243
T5 / 260	52	T5 / 1380	276
T5 / 270	54	T5 / 1400	280
T5 / 280	56	T5 / 1500	300
T5 / 295	59	T5 / 1600	320
T5 / 305	61	T5 / 1700	340
T5 / 330	66	T5 / 1800	360
T5 / 340	68	T5 / 1900	380
T5 / 355	71	T5 / 2000	400
T5 / 365	73	T5 / 2120	424
T5 / 370	74	T5 / 2240	448
T5 / 390	78	T5 / 2360	472
T5 / 400	80	T5 / 2500	500
T5 / 410	82	T5 / 2650	530
T5 / 420	84	T5 / 2800	560
T5 / 435	87	T5 / 3000	600
T5 / 455	91	T5 / 3150	630
T5 / 480	96	T5 / 3350	670
T5 / 500	100	T5 / 3550	710
T5 / 510	102	T5 / 3750	750
T5 / 525	105	T5 / 4000	800
T5 / 545	109	T5 / 4250	850
T5 / 560	112	T5 / 4500	900
T5 / 575	115	T5 / 4750	950
T5 / 610	122	T5 / 5000	1000
T5 / 620	124	T5 / 5300	1060
T5 / 630	126	T5 / 5600	1120
T5 / 660	132	T5 / 6000	1200
T5 / 690	138	T5 / 6300	1260
T5 / 720	144	T5 / 6700	1340
T5 / 750	150	T5 / 7100	1420
T5 / 780	156	T5 / 7500	1500
T5 / 815	163		

BRECO 齒型皮帶

AT5




Belt width mm: 6 10 16 25 32 50


最短接合長度 650 mm

BRECO 齒型皮帶

T5



T5-DL



Belt width mm: 6 10 16 25 32 50


最短接合長度 T5: 650 mm

最短接合長度 T5-DL: 1000 mm


T5 / AT5 Pulley

時規皮帶輪系列 


■ T5 齒形

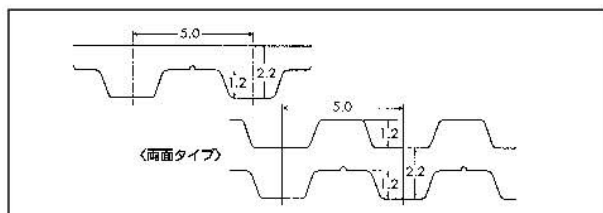


■ AT5 齒形

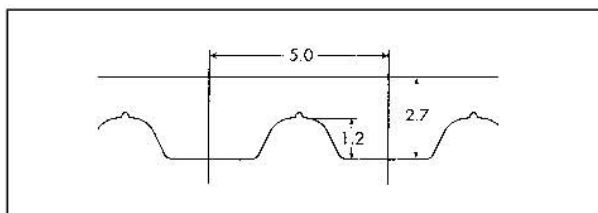

■ Pulley Type

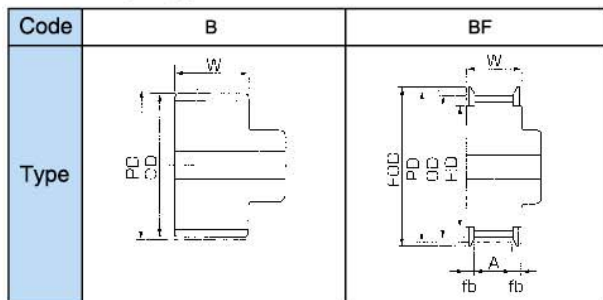

■ Pulley Code

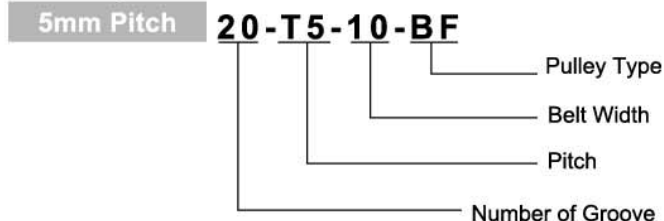

P.S

1.T5的OD比AT5的OD大0.4mm

2.此为T5的尺寸

Unit mm


■ Pulley Dimension Table

齒 數	OD	PD	FOD
12	18.25	19.10	25
13	19.85	20.69	25
14	21.45	22.28	28
15	23.05	23.87	28
16	24.60	25.46	30
17	26.20	27.06	32
18	27.80	28.65	33
19	29.40	30.24	35
20	31.00	31.83	38
21	32.70	33.42	40
22	34.25	35.01	40
23	35.85	36.61	43
24	37.40	38.20	44
25	39.00	39.79	45
26	40.60	41.38	48
27	42.20	42.97	48
28	43.75	44.56	50
29	45.35	46.15	52
30	46.95	47.75	55
31	48.55	49.34	56
32	50.10	50.93	57
33	51.70	52.52	57
34	53.25	54.11	60
35	54.85	55.70	61
36	56.45	57.30	64

齒 數	OD	PD	FOD
37	58.05	58.89	65
38	59.65	60.48	67
39	61.25	62.07	70
40	62.85	63.06	70
41	64.40	65.25	70
42	66.00	66.85	74
43	67.60	68.44	74
44	69.20	70.03	75
45	70.80	71.62	78
46	72.40	73.21	78
47	73.95	74.80	80
48	75.55	76.39	83
49	77.15	77.99	83
50	78.75	79.53	85
56	88.30	89.13	95
60	94.65	95.49	100
64	101.05	101.86	110
72	113.75	114.59	120
80	126.50	127.32	135
84	132.85	133.69	140
90	142.45	143.24	150
96	152.00	152.79	160
112	177.45	178.28	185

AT 10


Belt lengths shorter than 1100 mm only with Nylon tooth facing



規格	齒數	規格	齒數
AT10/ 500	50	AT10/ 2240	224
AT10/ 530	53	AT10/ 2360	236
AT10/ 560	56	AT10/ 2500	250
AT10/ 610	61	AT10/ 2650	265
AT10/ 630	63	AT10/ 2800	280
AT10/ 660	66	AT10/ 3000	300
AT10/ 700	70	AT10/ 3150	315
AT10/ 720	72	AT10/ 3350	335
AT10/ 780	78	AT10/ 3550	355
AT10/ 840	84	AT10/ 3750	375
AT10/ 890	89	AT10/ 4000	400
AT10/ 920	92	AT10/ 4250	425
AT10/ 960	96	AT10/ 4500	450
AT10/ 970	97	AT10/ 4750	475
AT10/ 980	98	AT10/ 5000	500
AT10/ 1010	101	AT10/ 5300	530
AT10/ 1080	108	AT10/ 5600	560
AT10/ 1150	115	AT10/ 6000	600
AT10/ 1210	121	AT10/ 6300	630
AT10/ 1240	124	AT10/ 6700	670
AT10/ 1250	125	AT10/ 7100	710
AT10/ 1320	132	AT10/ 7500	750
AT10/ 1400	140	AT10/ 8000	800
AT10/ 1500	150	AT10/ 9000	900
AT10/ 1600	160		
AT10/ 1700	170		
AT10/ 1800	180		
AT10/ 1900	190		
AT10/ 2000	200		
AT10/ 2120	212		


T10

Belt lengths shorter than 1100 mm only with Nylon tooth facing



T10-DL


Belt lengths shorter than 1100 mm only with Nylon tooth facing on one side



規格	齒數	規格	齒數
T10 / 500	50	T10 / 1560	156
T10 / 530	53	T10 / 1610	161
T10 / 560	56	T10 / 1750	175
T10 / 600	60	T10 / 1780	178
T10 / 610	61	T10 / 1880	188
T10 / 630	63		
T10 / 660	66	T10 / 1960	196
T10 / 690	69	T10 / 2250	225
T10 / 700	70	T10 / 2360	236
T10 / 720	72	T10 / 2500	250
T10 / 780	78	T10 / 2650	265
T10 / 810	81		
T10 / 840	84	T10 / 2800	280
T10 / 880	88	T10 / 3000	300
T10 / 890	89	T10 / 3100	310
T10 / 920	92	T10 / 3150	315
T10 / 960	96	T10 / 3350	335
T10 / 970	97		
T10 / 980	98	T10 / 3750	375
T10 / 1010	101	T10 / 4000	400
T10 / 1080	108	T10 / 4250	425
T10 / 1150	115	T10 / 4500	450
		T10 / 4750	475
T10 / 1210	121		
T10 / 1240	124	T10 / 5000	500
T10 / 1250	125	T10 / 5300	530
T10 / 1320	132	T10 / 5600	560
T10 / 1350	135	T10 / 6000	600
		T10 / 6300	630
T10 / 1390	139		
T10 / 1400	140	T10 / 6700	670
T10 / 1420	142	T10 / 7100	710
T10 / 1460	146	T10 / 7500	750
T10 / 1500	150		

BRECO 齒型皮帶

AT 10




Belt width mm: 16 25 32 50 75 100 150


最短接合長度 800 mm

BRECO 齒型皮帶

T10



T10-DL

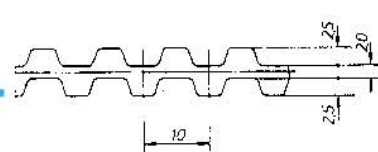


Belt width mm: 16 25 32 50 75 100

最短接合長度 T10: 800 mm
最短接合長度 T10-DL: 1000 mm


T10 / AT10 Pulley

時規皮帶輪系列 


■ T10 齒形

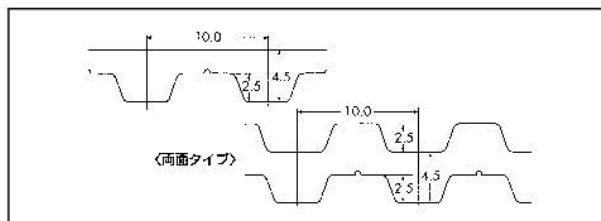

■ Pulley Type

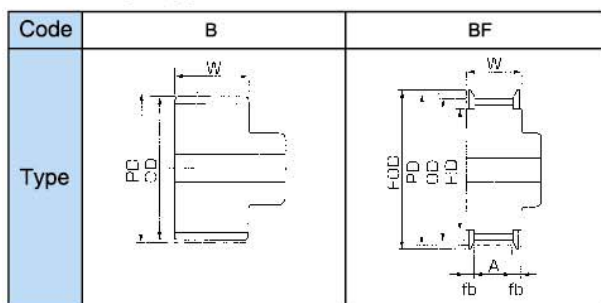

■ AT10 齒形

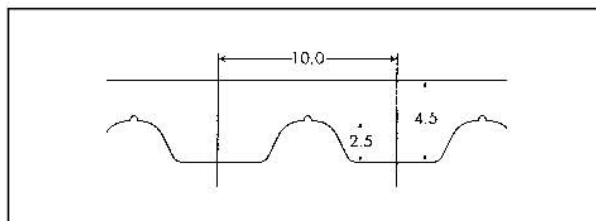

■ Pulley Code

10mm Pitch **20-AT10-25-BF**

— Pulley Type
 — Belt Width
 — Pitch
 — Number of Groove


■ Pulley Dimension Table

Unit mm


齒 數	OD	PD	FOD
12	36.35	38.20	46
13	39.50	41.38	48
14	42.70	44.56	50
15	45.90	47.75	55
16	49.05	50.93	57
17	52.25	54.11	60
18	55.45	57.30	64
19	58.60	60.48	67
20	61.80	63.66	70
21	65.00	66.85	74
22	68.15	70.03	75
23	71.35	73.21	80
24	74.55	76.39	85
25	77.70	79.58	87
26	80.90	82.76	90
27	84.10	85.94	95
28	87.35	89.13	98
29	90.45	92.31	100
30	93.65	95.49	105
31	96.80	98.68	110
32	100.00	101.86	110
33	103.20	105.04	115
34	106.40	108.23	120
35	109.55	111.41	120
36	112.75	114.59	125

齒 數	OD	PD	FOD
37	115.90	117.77	125
38	119.10	120.96	130
39	122.30	124.14	135
40	125.45	127.32	135
41	128.65	130.51	140
42	131.85	133.69	145
43	135.00	136.87	145
44	138.20	140.06	150
45	141.40	143.24	155
46	144.55	146.42	155
47	147.75	149.61	160
48	150.95	152.79	160
49	154.10	155.97	165
50	157.30	159.15	170
56	176.40	178.25	190
60	189.10	190.99	200
64	201.85	203.72	215
72	227.30	228.45	240
80	252.90	254.65	265
84	265.50	267.38	280
90	284.60	284.48	300
96	303.70	305.58	315
112	354.65	365.51	370


■ T20 齒形

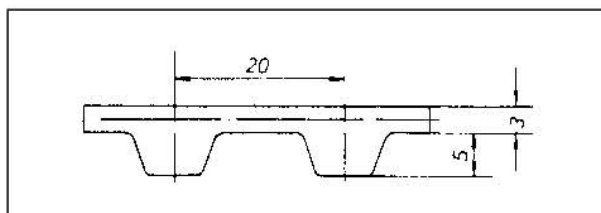

■ Pulley Type

Code	B	BF
Type		

■ AT20 齒形

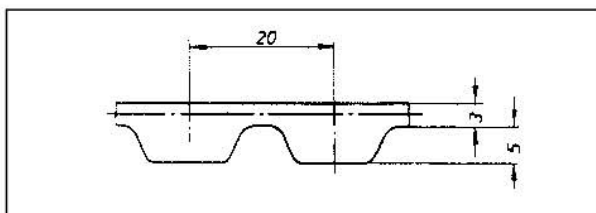

■ Pulley Code

20mm Pitch

30-AT20-50-BF

Pulley Type

- Belt Width

- Pitch

- Number of Groove

■ Pulley Dimension Table

齒 數	OD	PD	FOD
18	111.75	114.59	125
19	118.12	120.96	130
20	124.48	127.32	140
21	130.85	137.69	145
22	137.22	140.06	150
23	143.58	146.42	160
24	149.95	152.79	165
25	156.31	159.15	170
26	162.68	165.52	175
27	169.05	171.89	185
28	175.41	178.25	190
29	181.78	184.62	195
30	188.15	190.99	200
31	194.51	197.35	210
32	200.88	203.72	215
33	207.24	210.08	220
34	213.61	216.45	230
35	219.98	222.82	235
36	226.34	229.18	245
37	232.71	235.55	250
38	239.08	241.92	255
39	245.44	248.28	260
40	251.81	254.65	265
41	258.17	261.11	270
42	264.54	267.38	280

Unit mm

[illegible]